

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau




(43) International Publication Date
29 August 2002 (29.08.2002)

PCT

(10) International Publication Number
WO 02/067024 A1

- (51) International Patent Classification⁷: **G02B 5/28, F21V 7/22**
- (21) International Application Number: **PCT/IB02/00110**
- (22) International Filing Date: **16 January 2002 (16.01.2002)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
01200618.5 21 February 2001 (21.02.2001) EP
- (71) Applicant: **KONINKLIJKE PHILIPS ELECTRONICS N.V. [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).**
- (72) Inventors: **HILDENBRAND, Volker, D.; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL). MUTTER, Claudia; Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).**
- (74) Agent: **ROLFES, Johannes, G., A.; Internationaal Octrooibureau B.V., Prof. Holstlaan 6, NL-5656 AA Eindhoven (NL).**
- (81) Designated States (national): **CN, JP.**
- (84) Designated States (regional): **European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).**
- Published:
— *with international search report*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: **LUMINAIRE**

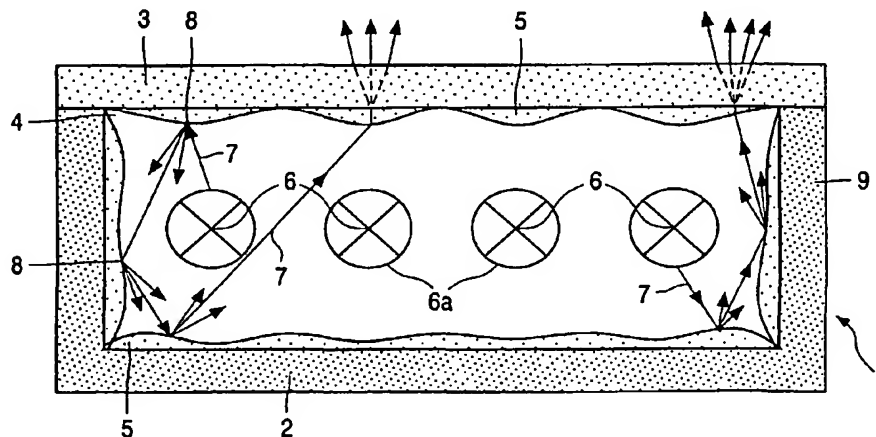

(57) Abstract: The invention relates to a luminaire (1) comprising a reflector body (9) having a reflecting part (2) provided with a light reflective coating (5), and comprising contact means (6) for electrically connecting a light source. The coating (5) comprises at least two, light reflective particle groups, the groups exhibiting a mutually different color because of an interference layer (12a-d) provided on the particles (10a-d) which is different for the respective groups. A white color impression of the coating (5) is obtainable when the groups are jointly used in relative proportions in the coating (5). The coating (5) does not suffer from intrinsic absorption, or from color shift.



WO 02/067024 A1

Luminaire

The invention relates to a luminaire comprising:

a reflector body having a reflective part provided with a coating, the coating in which exists at least a first and a second interference layer, the layers being mutually different, the coating further comprising at least one material selected from a set consisting of
5 materials with a high-index of refraction and at least one further material selected from a further set consisting of materials with a low-index of refraction;

contact means for electrically connecting a light source.

10 Such a luminaire is known from US-3,644,730. In the known luminaire the coating is light reflecting and comprises two or more interference layers of one-quarter wavelength each, the layers are alternatively of high- and low-index material. By choosing the number of layers, their index of refraction and their respective thickness the coating can be given particular desired optical properties. The optical properties of the coating are based
15 on interference of light, the material of the interference layers being partly transparent for light. The interference is used to selectively influence wavelength dependence of reflection and transmission of the coating. It is thus enabled for the coating to be selectively reflective, for example, to be transparent for IR-radiation whilst being reflective for visible radiation. It is a disadvantage that the manufacturing of the reflective coating is cumbersome since for the
20 coating to appear white, i.e. the coating being essentially total reflective for all wavelengths of the visual spectrum, a large number of alternate layers of high- and low-index materials is required. The manufacturing is even more cumbersome as it is difficult to apply the coating on the curved/shaped surface of the reflecting part of the luminaire. Alternatively, when a coating step is done before a shaping step, the manufacturing is even so cumbersome as the
25 shaping of the pre-coated reflector involves significant risk of damage to the coating.

In a backlighting system the light reflecting coating might simultaneously act as a coating for a diffuser, i.e. due to scattering by the coating light passing through the diffuser is diffused. For example titanium dioxide particle coatings are generally known for that purpose. For such scattering of light to occur effectively, the coating should comprise

particles having a size in the order of the wavelengths to be scattered, i.e. in the range of less than 1 μm . However, conventional coatings of essentially white particles of the indicated size, for example generally known titanium dioxide, suffer from color shift due to wavelength dependent scattering.

5

It is an object of the invention to provide a luminaire of the kind as described in the opening paragraph in which the abovementioned disadvantages are counteracted.

Thereto the luminaire of the type as described in the opening paragraph is
10 characterized in that the coating comprises at least a first and a second light reflective particle group, the first interference layer being provided on particles of the first particle group, and the second interference layer being provided on particles of the second particle group,

for each light reflective particle group applies that the particles of the particle group consist of a material selected from one of said sets and that the respective interference
15 layer consists of a material selected from a remaining set of said sets, wherein materials for each respective particle group are selected irrespectively of materials of any other particle group,

relative quantities of each respective light reflective particle group being chosen such, that when their reflections are blended, there is produced white light of
20 predetermined CIE coordinates.

A generally known method for obtaining white light by blending relative spectral proportions is described in Van Nostrand's Scientific Encyclopedia by Douglas M. Considine, Van Nostrand Reinhold Company, New York (1976), 5th edition. In US-4,434,010 a method to manufacture particles with an interference layer is disclosed. Particles with an
25 interference layer are commercially available, for example under the trade name Iriodin/Afflair, and exhibit pearlescence, i.e. the particles have a milky brightness. The color of the pearlescent particles is due to the interference of light, i.e. interference of a part of the visible spectrum. In comparison thereto, conventional pigments absorb a part of the visible spectrum, while luminescent materials emit a part of the visible spectrum. The mutually
30 different color of the interference (or pearlescent) pigments and thus of the particle groups is due to the interference layers being mutually different. For example, the interference layers of the first particle group with respect to the second one can differ either in layer thickness or in index of refraction, for example in that they are made of different materials. The particles preferably have a relatively large size, i.e. $\geq 5\mu\text{m}$, and for that reason wavelength dependent

scattering and hence color shift is counteracted. In the coating applied in the inventive luminaire, the particles in general have a relatively random orientation compared to the orientation of a layer on the shaped surface of the reflecting part of the known luminaire. It is generally known that the reflectance and color appearance of an interference layer is dependent on the wavelength and the angle of incidence of light. However, it was observed that the coating in the luminaire of the invention exhibits less dependency both on the incident angle of light and on the view angle on the coating. This can be explained by the relatively random orientation of the particles, and thus of the interference layer provided thereon, or the use of the blend of the different particle groups wherein a coloring effect of one particle group is more or less compensated for by another particle group. Preferably each particle within one of the particle groups is provided with the respective interference layer, and so further improving the independency of incident angle of light and view angle with respect to the color appearance. When the coating comprises at least two groups of mutual differently colored particle groups in appropriate relative proportions, it is possible to effectively counteract that the coating exhibits a particular color. Surprisingly, it appeared that the colors of the particle groups don't behave as subtractive colors as is the case for pigments, i.e. the combination of colors leads to darker/black colors. On the contrary, the colors of the particle groups behave as additive colors as is the case for luminescent materials, i.e. the combination of colors lead to whiter colors. Thus a coating which appears white for the human eye is obtainable. Such a white coating is especially well obtainable when in the coating the particles of said particle groups are mixed instead of being stacked as separate layers on each other. Coatings consisting of particles are relatively easily applied, for example by spraying, onto the reflector body, thus enabling the relatively easy manufacture of the luminaire having a white coating. It appeared that the coating of pearlescent particles has a relatively high reflection and that the interference layer is practically fully transparent for light. As a result, said coating has the advantage that larger numbers of reflections inside the coating and/or variations in thickness in the coating do not lead to significant light loss or to a color shift. Such light loss and/or said color shift, however, can be observed by conventional white powder coatings with optimized scattering power, such as, for example, a coating comprising titanium dioxide particles.

When a combination of two particle groups is used in the coating, the choice of the first particle group is determined in relation with the second particle group. The particle groups each have respective color coordinates in the CIE x,y-chromaticity diagram. A line drawn in the CIE x,y-chromaticity diagram between the color coordinates of the

respective particle groups crosses an area of color coordinates of light which has a white appearance to the human eye, i.e. the white color area. In said coating the relative quantities of the two particle groups are chosen in proportion to the length of the section of the drawn line from the respective color coordinates to the white color area, so that when their

5 reflections are blended, there is produced light with color coordinates of light that has a white appearance to the human eye. A generally known method for obtaining white light by blending relative spectral proportions is described in Van Nostrand's Scientific Encyclopedia by Douglas M. Considine, Van Nostrand Reinhold Company, New York (1976), 5th edition. A favorable combination of two particle groups is, for example, a blue colored particle group

10 with a gold colored particle group, as in this case in the white color area the drawn line between the color coordinates of the respective particle groups in this case runs substantially parallel to the black body line. This offers the advantage that the relative quantities of the two particle groups can be varied over a relatively wide range whilst a white color appearance is still obtainable. This combination of two groups enables in a relatively simple way the

15 manufacture of a coating which appears white for the human eye. When three particle groups are used in the coating, the particle groups are chosen such, that the triangle formed by the color coordinates of the particle groups in the CIE x,y-chromaticity diagram encloses the white color area. The same reasoning goes for a coating comprising four or more particle groups. A favorable combination of three particle groups is, for example, a blue colored

20 particle group with a green colored particle group and a red colored particle group. The combination of these three groups enables relatively easy to obtain a coating with a specific white color impression and/or makes an even wider range of coatings with a different white color obtainable than is obtainable with two particle groups.

In another embodiment of the luminaire according to the invention the coating

25 comprises four or five particle groups, the coating is particularly suitable for luminaires in which a relatively large number of reflections of light occur, for example in a backlighting system. In such backlighting systems often a diffusor is provided with a coating purposely having a variation in thickness to diffuse the light originating from the light source, which light subsequently is used to homogeneously illuminate a screen. In the event that the

30 reflection of the coating is dependent on the wavelength of the visible spectrum, each reflection results in a color shift, as one part of the spectrum is reflected more efficiently than another part of the spectrum. When only a small number of reflections are involved, said color shift often is not distinguishable by an observer. However, when a relatively large number of reflections are involved, as is often the case in a backlighting system, the color

shift is enhanced and might become visible. The visibility of the color shift is enhanced when areas of the diffusor with color shift and areas without color shift are adjacent (or border) each other. By the number of groups in the coating being four or five, it is possible to give the coating a reflection that is practically constant for the visible range of the spectrum, enabling color shift due to thickness variation of the coating to be reduced to an acceptable low level. Furthermore the number of groups being four or five in the coating, renders the coating to be less sensible for local inhomogeneities which otherwise may lead to color differences exhibited by the coating. Moreover it is easier to obtain the white appearance of the coating as the white appearance of the coating is less sensible to fluctuations in composition of the coating and layer thickness variations of the interference layer on the particles. From experiments it was apparent that the respective particle groups exhibiting respectively a blue, green, red, gold and platinum-gold color, are in particular suitable to obtain the desired, homogeneous white appearance of the coating.

The luminaire according to the invention is in particular suitable as a back-lighting system, for example in a liquid crystal display (LCD) system. In back-lighting systems a large number of multiple reflections are required to obtain a homogeneous distribution of light which light subsequently is to be supplied to the LCD. In conventional systems said large number of multiple reflections leads to effects of relatively large light losses and/or to color shifts, said effects being counteracted by the luminaire according to the invention comprising said interference coating.

An embodiment of the luminaire of the invention will be further elucidated schematically in the drawing, in which

- Fig. 1 is a schematic view of a luminaire according to the invention;
- Fig. 2 illustrates the x,y-chromaticity diagram of the CIE system;
- Fig. 3 is a detail of a coating for a luminaire according to the invention;
- Fig. 4 is a graph showing the transmission T versus the wavelength λ of an interference coating as used in a luminaire according to the invention.

Fig. 1 shows a luminaire 1 for a backlight system in cross-section. The luminaire 1 has a reflector body 9 with a reflective part 2 and a diffusor part 3 which is positioned in front of a light emission window 4 of the luminaire 1. The reflective part 2 and

the diffusor part 3 are both coated with a coating 5, but the coating 5 may alternatively be provided solely on the reflective part 2. In Fig. 1 the luminaire 1 is provided with contact means 6. In Fig. 1 four tubular low-pressure mercury discharge fluorescent lamps 6a are accommodated in the contact means 6, for example PLS 11W. The lamps 6a are positioned in a longitudinal direction perpendicular to the plane of the drawing and along the light emission window 4. During operation of the lamps 6a, light beams 7 originating from the lamps 6a fall upon the coating 5 and are either reflected by the coating 5 or transmitted through the coating 5 and the diffusor 3. At each reflection 8 of the light beams 7 at the coating 5 some scattering of the light beams 7 occurs, eventually resulting in a homogeneous distribution of light. Finally upon transmission of the light beams 7 through the diffusor 3 a final scattering of the light beams 7 takes place. As a result an object is illuminated homogeneously by the luminaire 1.

In FIG. 2 is shown the CIELAB x, y-chromaticity diagram as defined by the CIE system and superimposed thereon are the various colors A, B, and C shown as letters which indicate areas of the color coordinates of present pearlescent powders. The CIE illuminant D is also shown and represents the color of natural daylight. As a general rule, any color which falls within an area 100 enclosed by the dashed line, i.e. the white color area, will have a white appearance to the human eye. Considering the present invention more specifically in the case of a coating comprising three pearlescent reflective particle groups, i.e. Iriodin 231 (green), 211 (red), and 221 (blue). The first light-reflective particle group, when illuminated, exhibits a green to yellow-green reflection located substantially in area A in FIG. 2. A second of the remaining reflective particle groups, when illuminated, generates an orange to red reflection located substantially in area B in FIG. 2. The third of the light reflective particle groups, when illuminated, reflects purplish-blue to greenish-blue, located primarily in area C in FIG. 2. Upon a combination of relative proportions of said reflective particle groups being chosen such, that when their reflections are blended, there is produced white light of predetermined CIE coordinates, i.e. the coordinates of the produced light lie within the white color area 100 enclosed by the dashed line, for example at point D.

FIG. 3 shows a detail of the coating 5 of the luminaire of FIG. 1 in cross-section. The coating 5 comprises four mixed particle groups of mutually differently colored particles 10a-d. All particles have a core 11 of a low index material, for example mica, and an interference layers 12a-d of a high-index material, for example titanium dioxide. The first interference layer being provided on the particles of the first particle group, the second interference layer being provided on the particles of the second particle group, the third

interference layer being provided on the particles of the third particle group, and so on. Said interference layers all being mutually different. For the sake of clarity, the four differently colored particle groups are represented in the drawing by markings in the core 11, respectively no marking, X, – and •. The particles 10a-d exhibit respectively a platinum-gold, red, blue and green color due to the mutually different interference layer 12a-d, for example Iridin 205 (platinum gold), 211 (red), 221 (blue), 231 (green) and are intermixed present in the coating 5 yielding the coating to exhibit a white color. The coating 5 is provided on the diffuser 3 by means of spraying of a suspension comprising a binder, for example THV200 or silicon lacquers or silica-based sol-gel systems, and the colored particle groups in a solution, for example methyl-isobutyl-ketone. The amount of solid in the eventually obtained dried layer is preferably 10-30 % by volume, i.e. 23 % by volume in the given example.

FIG. 4 shows a transmission spectrum of a coating of a mixture 21 of five differently colored particle groups, compared to transmission spectra of corresponding anatase 22 and rutile coating 23, which are both crystal modifications of titanium dioxide. The five different particle groups in the mixture coating 23 are Iridin 28% 201 (gold), 7% 205 (platinum gold), 23% 211 (red), 21% 221 (blue), and 21% 231 (green), all percentages by weight. The respective particle size ranges of the particle groups are Iridin 201 (gold) 5-25 μm , 205 (platinum gold) 10-60 μm , 211 (red) 5-25 μm , 221 (blue) 5-25 μm , and 231 (green) 5-25 μm . In table 1 CIELAB color shifts Δa and Δb of the coating 21, 22, and 23 with respect to a standard known under the trade name Spectralon, the reflectance R, coating thickness C and a measure of the reflection power R/C of the coatings 21, 22, and 23 are given. Table 1 shows that the mixture 23 has a color shift which is satisfactorily small and which is much smaller than the color shifts of anatase and rutile.

	Δa	Δb	R [%]	C [μm]	R/C [%/ μm]
Anatase 21	1.8	7.8	63	9	7
Rutile 22	2.2	7.4	74	9	8
Mixture 23	-1.2	0.2	47	12	4

Table 1.

As is shown in FIG. 4 this color shift is due to the transmission of the coating being dependent on the wavelength which is explainable by wavelength dependent scattering of the anatase 22 and rutile coating 23. This wavelength dependent scattering is practically absent in the case of the coating of the mixture 21. The reflection power R/C of the mixture 23 is less than those of anatase 21 and rutile 23, however, it is apparent from Fig. 4 and table

1 that the combination of said five particle groups surprisingly yields the white color impression of the coating mixture 23.

CLAIMS:

1. A luminaire (1) comprising:
a reflector body (9) having a reflective part (2) provided with a coating (5), the coating (5) comprising at least a first and a second interference layer (12a-d), the layers (12a-d) being mutually different, the coating further comprising at least one material selected from a set consisting of materials with a high-index of refraction and at least one further material selected from a further set consisting of materials with a low-index of refraction;
contact means (6) for electrically connecting a light source,
characterized in that the coating (5) comprises at least a first and a second light reflective particle group, the first interference layer (12a-d) being provided on the particles (10a-d) of the first particle group and the second interference layer (12a-d) being provided on the particles (10a-d) of the second particle group, the particles of the first particle group being of a material selected from one of said sets and the first interference layer being of a material selected from a remaining set of said sets, the particles of the second particle group being of a material selected from one of said sets and the second interference layer being of a material selected from a remaining set of said sets,
relative quantities of each respective light reflective particle group being chosen such, that when their reflections are blended, there is produced white light of predetermined CIE coordinates.
2. A luminaire (1) according to claim 1, characterized in that each particle of one of the particle groups is provided with a respective interference layer.
3. A luminaire (1) according to claim 1 or 2, characterized in that the coating (5) comprises two particle groups, the respective particle groups exhibiting respectively a blue and a gold color.
4. A luminaire (1) according to claim 1 or 2, characterized in that the coating (5) comprises three particle groups, the respective particle groups exhibiting respectively a blue, a green and a red color.

5. A luminaire (1) according to claim 1 or 2, characterized in that the coating (5) comprises four particle groups, the respective particle groups exhibiting respectively a blue, green, red and platinum-gold color.
- 5
6. A luminaire (1) according to claim 1 or 2, characterized in that the coating (5) comprises five particle groups, the respective particle groups exhibiting respectively a blue, green, red, gold and platinum-gold color.
- 10 7. A luminaire (1) according to any one of the preceding claims characterized in that in the coating (5) the particles (10a-d) of said particle groups are mixed.
8. A luminaire (1) according to any one of the preceding claims characterized in that the particles (10a-d) have a particle size of at least 5 μm .
- 15
9. A luminaire (1) according to any one of the preceding claims characterized in that the luminaire is a backlighting system.

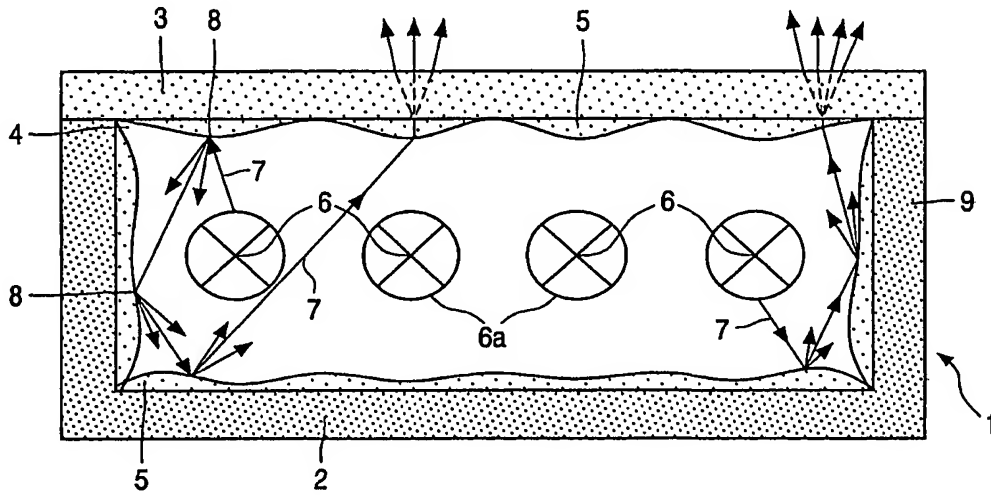


FIG. 1

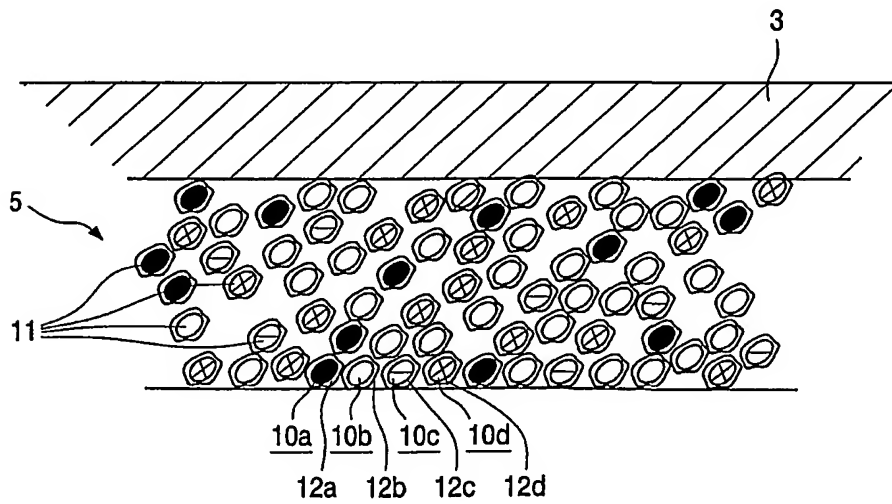


FIG. 3

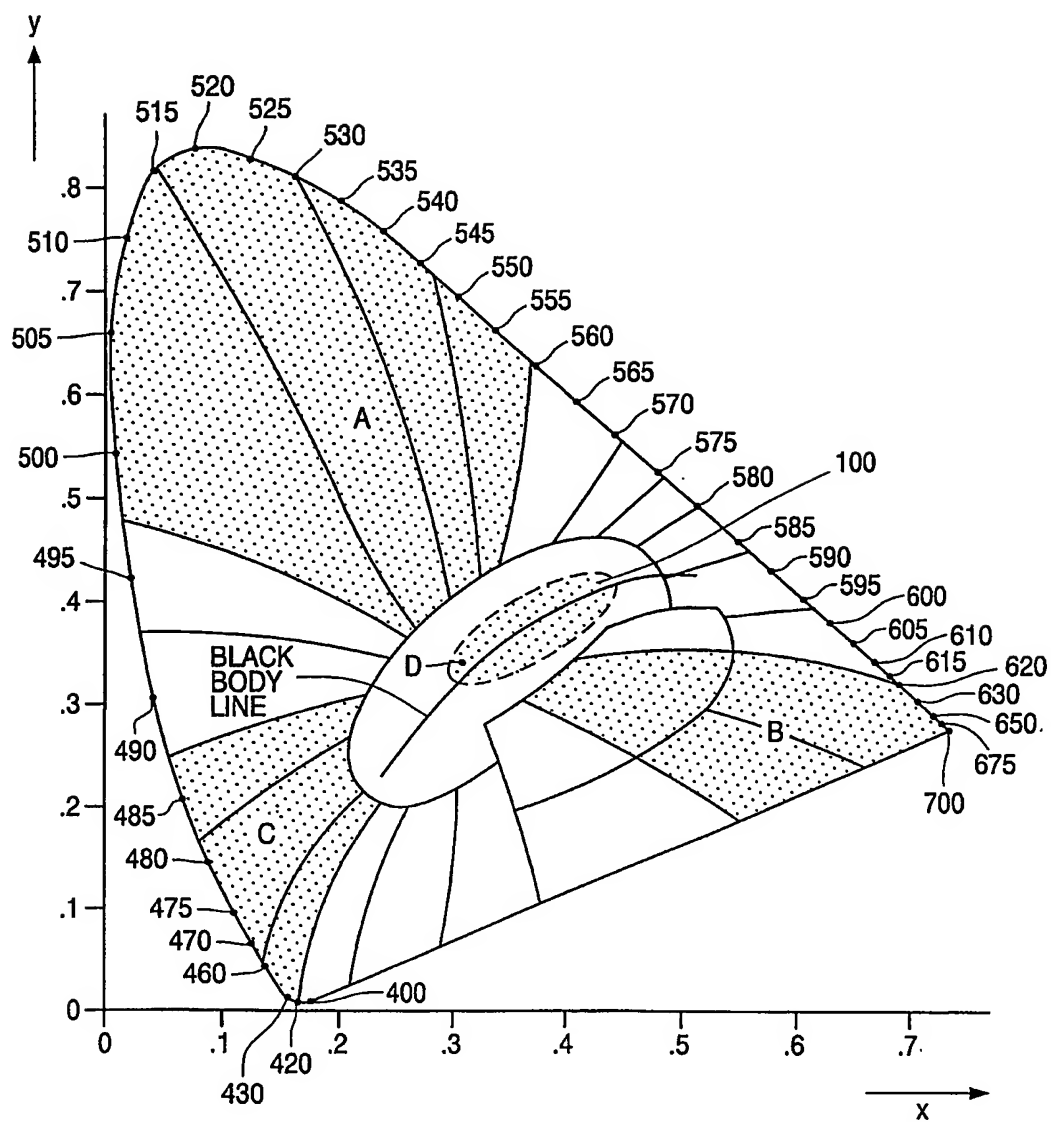


FIG. 2

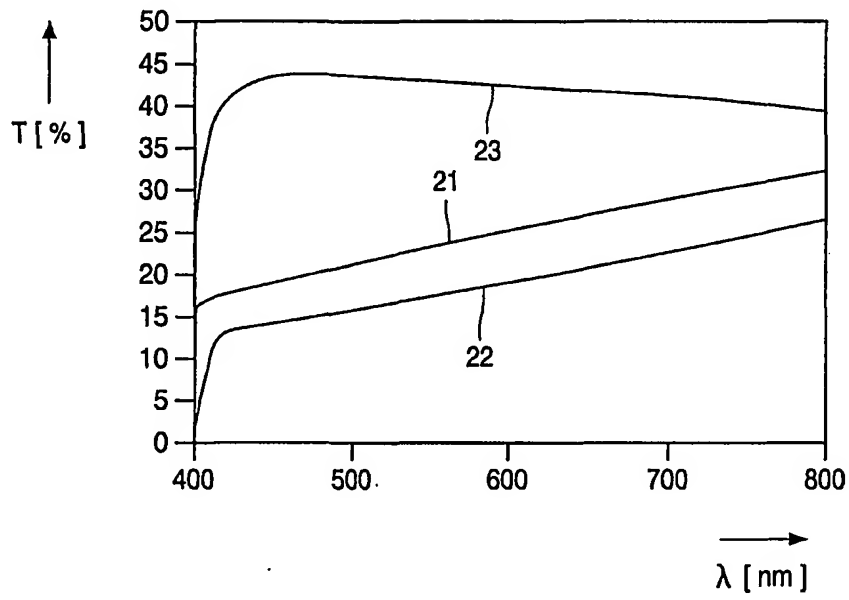


FIG. 4

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/IB 02/00110

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G02B5/28 F21V7/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F21V G02B C09C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the International search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 971 246 A (SHISEIDO CO LTD) 12 January 2000 (2000-01-12) page 2, line 52 - page 3, line 51 page 4, line 36 - line 46 figure 1	1
A	EP 0 460 913 A (TOSHIBA LIGHTING & TECHNOLOGY) 11 December 1991 (1991-12-11) abstract figure 1	1
A	EP 0 617 092 A (GEN ELECTRIC) 28 September 1994 (1994-09-28) abstract claims 16-20 figure 1B	1
-/-		

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* & * document member of the same patent family

Date of the actual completion of the international search

12 April 2002

Date of mailing of the international search report

22/04/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Prévot, E

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IB 02/00110

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 99 13013 A (TAYLOR STEVE ;NORSK HYDRO AS (NO); HALLENSTVET MERETE (NO); SPOORE) 18 March 1999 (1999-03-18) abstract claims 1,2 ---	1
A	US 4 434 010 A (ASH GARY S) 28 February 1984 (1984-02-28) cited in the application column 2, line 44 - line 55 column 1, line 47 - line 52 column 4, line 55 -column 5, line 16 figures 1C,4 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB 02/00110

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0971246	A	12-01-2000	WO 9938036 A1 EP 0971246 A1	29-07-1999 12-01-2000
EP 0460913	A	11-12-1991	JP 4039854 A EP 0460913 A2 KR 9307438 B1	10-02-1992 11-12-1991 10-08-1993
EP 0617092	A	28-09-1994	US 5723937 A CA 2116948 A1 CN 1093173 A DE 69413097 D1 DE 69413097 T2 EP 0617092 A2 HU 68532 A2 JP 6347618 A	03-03-1998 23-09-1994 05-10-1994 15-10-1998 12-05-1999 28-09-1994 28-06-1995 22-12-1994
WO 9913013	A	18-03-1999	NO 974171 A AU 9098098 A WO 9913013 A1	10-03-1999 29-03-1999 18-03-1999
US 4434010	A	28-02-1984	US 5383995 A US 5648165 A US 5569535 A US 5653792 A US 5570847 A US 5571624 A US 5766738 A US 5135812 A US 5171363 A US 5281480 A US 5279657 A US 5059245 A US 5084351 A	24-01-1995 15-07-1997 29-10-1996 05-08-1997 05-11-1996 05-11-1996 16-06-1998 04-08-1992 15-12-1992 25-01-1994 18-01-1994 22-10-1991 28-01-1992